


## W-Series KDKS 1EN/LLC 10-36V AC/DC

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

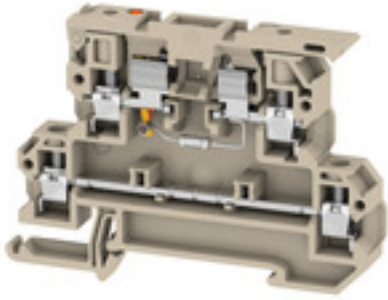

### Klippon® Connect with clamping yoke Technology

The high reliability and variety of designs of the terminal blocks with clamping yoke connections make planning easier and optimises operational safety. Klippon® Connect provides a proven response to a range of different requirements.

### General ordering data

Type	KDKS 1EN/LLC 10-36V AC/DC
Order No.	<a href="#">9802720001</a>
Version	W-Series, Fuse terminal, Rated cross-section: 4 mm <sup>2</sup> , Screw connection
GTIN (EAN)	4050118175318
Qty.	50 pc(s).

**W-Series**  
**KDKS 1EN/LLC 10-36V AC/DC**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

**Technical data**
**Dimensions and weights**

Width	8 mm	Width (inches)	0.315 inch
Height	76.5 mm	Height (inches)	3.012 inch
Depth	54.6 mm	Depth (inches)	2.15 inch
Net weight	20.694 g		

**Material data**

Material	Wemid	Colour	Dark Beige
UL 94 flammability rating	V-0		

**System specifications**

End cover plate required	Yes	Number of potentials	2
Number of levels	2	No. of clamping points per level	2
Number of potentials per tier	1	Levels cross-connected internally	No
PE connection	No	Mounting rail	TS 32, TS 35
N-function	No	PE function	No
PEN function	No		

**Additional technical data**

Open sides	right
------------	-------

**CSA rating data**

Certificate No. (CSA)	200039-70000261	Current size B (CSA)	25 A
Current size C (CSA)	25 A	Current size D (CSA)	10 A
Voltage size B (CSA)	300 V	Voltage size C (CSA)	150 V
Voltage size D (CSA)	300 V	Wire cross section max. (CSA)	12 AWG
Wire cross section min. (CSA)	26 AWG		

**Conductors for clamping (rated connection)**

Blade size	0.6 x 3.5 mm	Clamping range, max.	4 mm <sup>2</sup>
Clamping range, min.	0.22 mm <sup>2</sup>	Clamping screw	M 3
Connection cross-section, finely stranded, max.	4 mm <sup>2</sup>	Connection cross-section, finely stranded, min.	0.5 mm <sup>2</sup>
Connection cross-section, stranded, max.	4 mm <sup>2</sup>	Connection cross-section, stranded, min.	1.5 mm <sup>2</sup>
Connection direction	on side	Gauge to IEC 60947-1	A3
Tightening torque, max.	0.8 Nm	Tightening torque, min.	0.5 Nm
Twin wire-end ferrules, max.	1.5 mm <sup>2</sup>	Twin wire-end ferrules, min.	0.5 mm <sup>2</sup>
Type of connection	Screw connection	Wire connection cross section, finely stranded, max.	4 mm <sup>2</sup>
Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, max.	4 mm <sup>2</sup>	Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, min.	0.5 mm <sup>2</sup>
Wire connection cross-section, finely stranded, min.	0.5 mm <sup>2</sup>	Wire connection cross-section, solid core, max.	4 mm <sup>2</sup>
Wire connection cross-section, solid core, min.	0.5 mm <sup>2</sup>		

**W-Series**  
**KDKS 1EN/LLC 10-36V AC/DC**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

**Technical data****Fuse terminals**

Cartridge fuse	G-Si. 5 x 20	Display	red LED
Leakage current, max.	0.286 mA	Permitted power loss for fuse with semiconductor protection	
Power loss for overload and short-circuit protection for a composite arrangement	1.6 W at 6.3 A @ 23°C	Power loss for overload and short-circuit protection for an individual arrangement	1.6 W at 6.3 A @ 29°C
Power loss for short-circuit protection only for a composite arrangement	2.5 W at 6.3 A @ 41°C	Power loss for short-circuit protection only for an individual arrangement	4.0 W at 6.3 A @ 44°C
Power loss, 1-pole ; 2-pole ; 3-pole			

**Rating data**

Rated cross-section	4 mm <sup>2</sup>	Rated voltage	36 V
Rated voltage to adjoining terminal	500 V	Rated current	6.3 A
Pollution severity	3	Surge voltage category	III

**UL rating data**

Certificate No. (UR)	E60693	Conductor size Factory wiring max. (UR)	12 AWG
Conductor size Factory wiring min. (UR)	26 AWG	Conductor size Field wiring max. (UR)	12 AWG
Conductor size Field wiring min. (UR)	22 AWG	Current size B (UR)	20 A
Current size C (UR)	20 A	Voltage size B (UR)	250 V
Voltage size C (UR)	300 V		

**Classifications**

ETIM 5.0	EC002780	ETIM 6.0	EC000899
eClass 7.1	27-14-11-52	eClass 8.1	27-14-11-52
eClass 9.0	27-14-11-52	eClass 9.1	27-14-11-16

**Approvals**

Approvals



ROHS Conform

**Downloads**

Approval/Certificate/Document of Conformity	<a href="#">DE_PT1302_20160418_192_ISSUE01.pdf</a>
Brochure/Catalogue	<a href="#">CAT 1 TERM 16/17 EN</a>
Engineering Data	<a href="#">EPLAN.WSCAD</a>

**Safety note**Safety notice [Safety Information](#)